
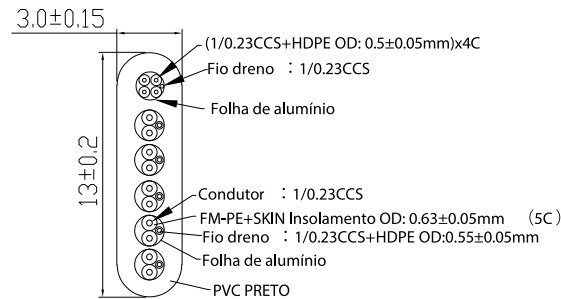




**TESTE ELÉTRICO:**

1. 100% TESTE DE FIO MIS CURTO ABERTO
2. RESISTÊNCIA DE CONTATO: 3 OHM MAX
3. RESISTÊNCIA DE ISOLAMENTO: 5M OHM MIN
4. TESTE HI-POT: DC 300V/10ms
5. PASSA NO TESTE 4K@60HZ

Código	Comprimento (mm)
018-5005	500±20
018-5021	1000±30
018-5022	2000±30
018-5023	3000±30
018-5025	5000±50

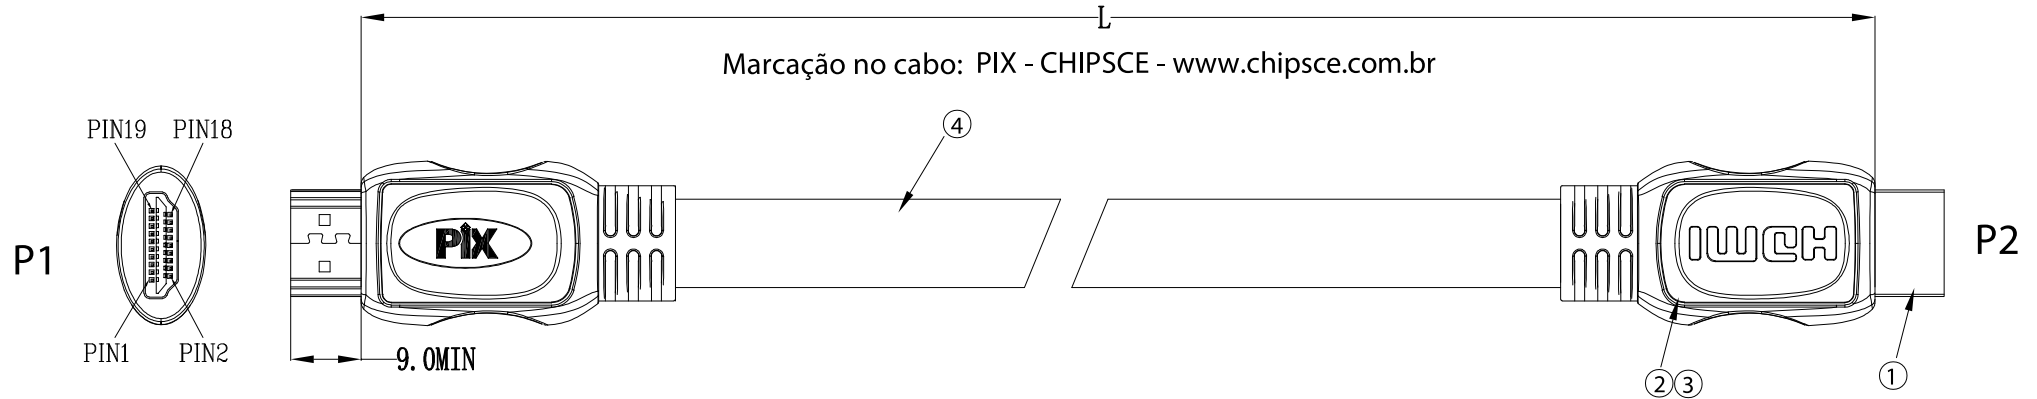

Distribuição dos pinos

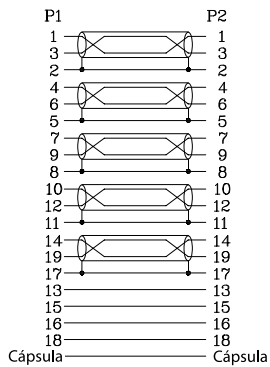

④	Cabo	(1/0,23CCS*1P+D1/0,23CCS+AL-Mylar)*5C+ (1/0,23CCS*4C++D1/0,23CCS+AL-Mylar)*1C+D1/0,23CCS Revestimento de PVC PRETO OD:3,0*13mm	M
③	Molde externo	PVC 45P BLACK	g
②	Molde interno	Cor natural	g
①	Conector	HDMI banhado a ouro	2pcs

DESCRIÇÃO				
MODELO		△		
Nº DO DESENHO	-	△		
ACABAMENTO		△	2023/03/09	A1
MATERIAL			DATA	REVISÃO